
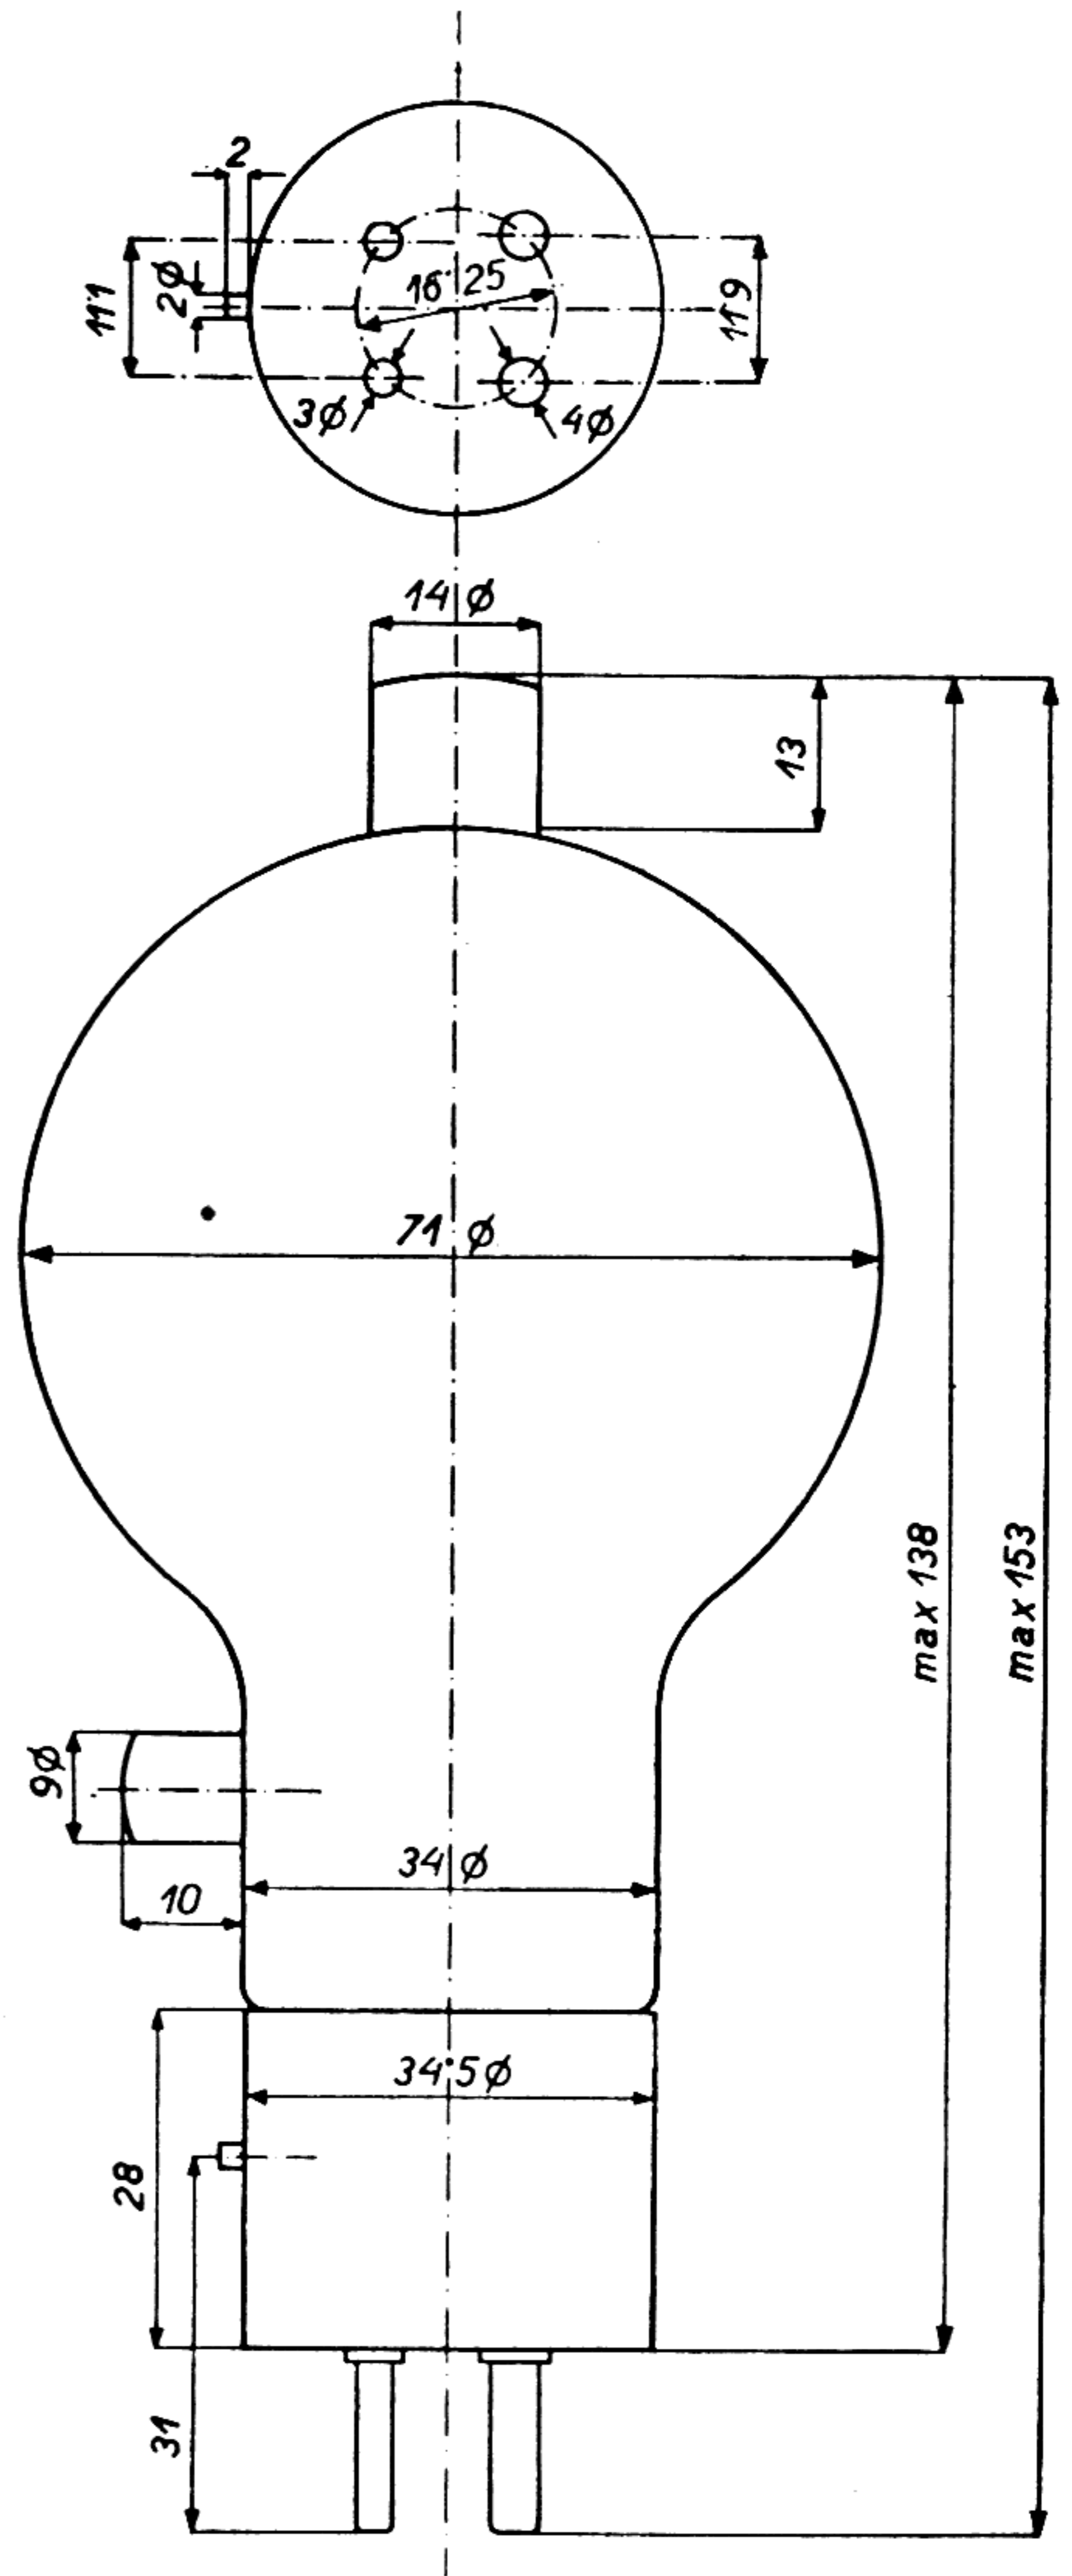


TUNGSRAM RADIO

Kurzwellensenderöhre mit thoriertem Heizfaden



OQQ 50/1500

Gewicht cca 75 g

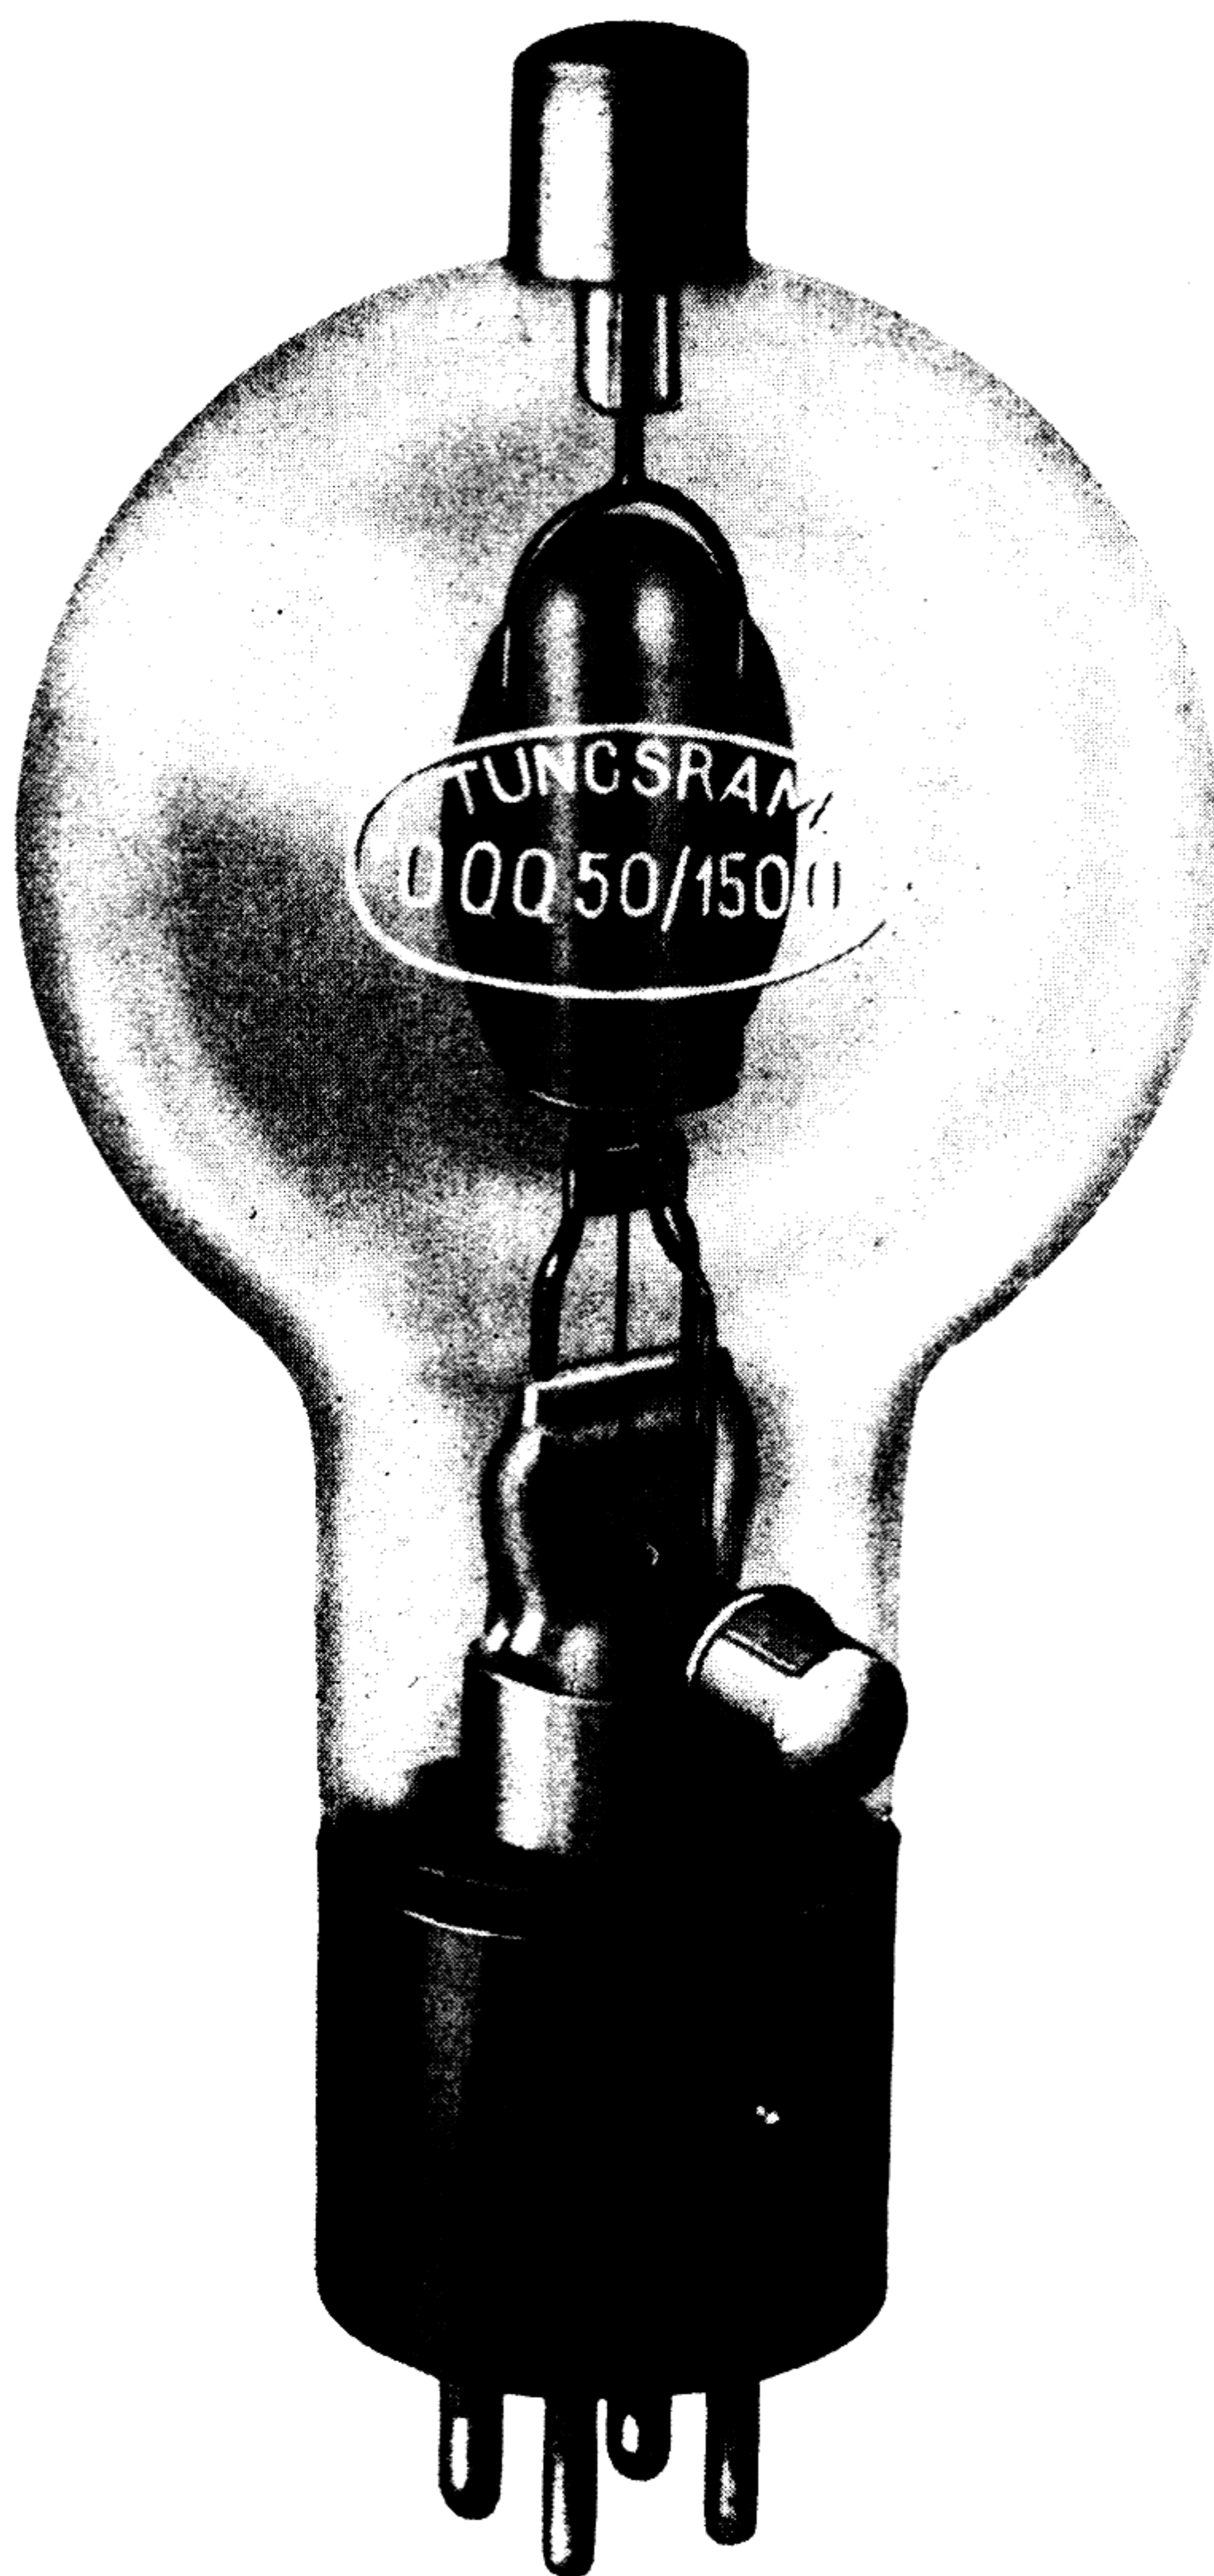

Socket: F 48

TUNGSRAM RADIO

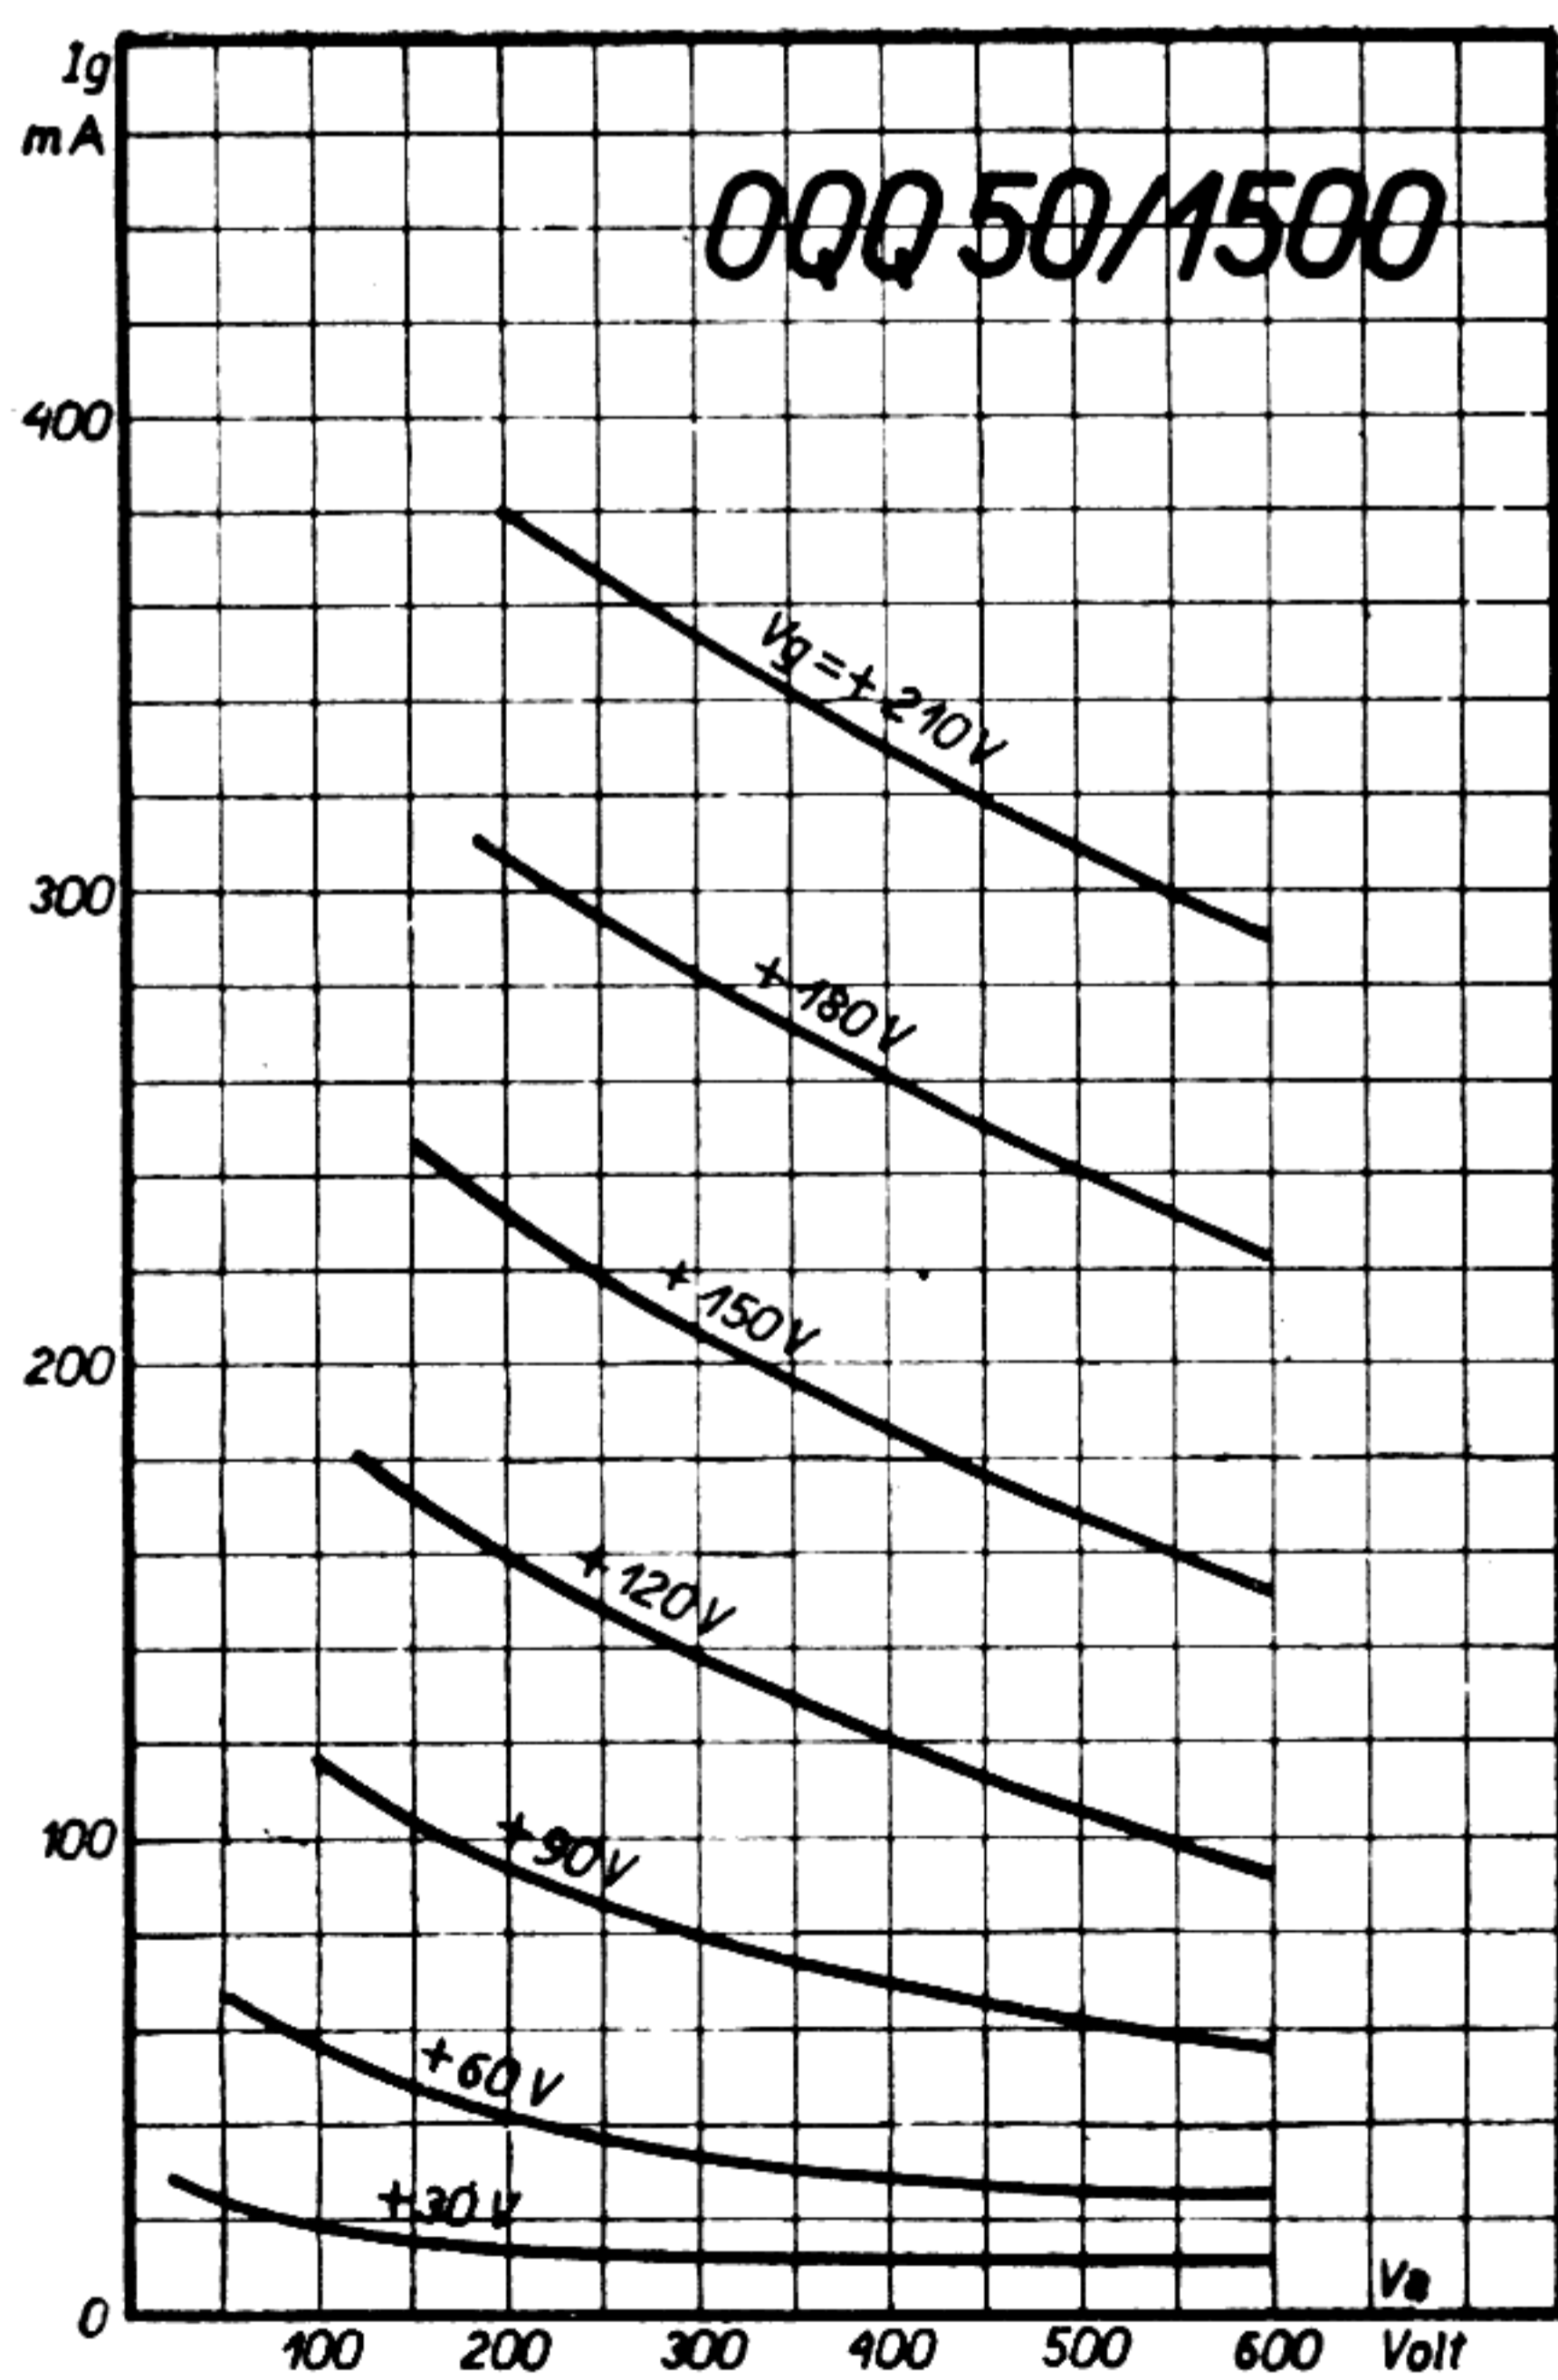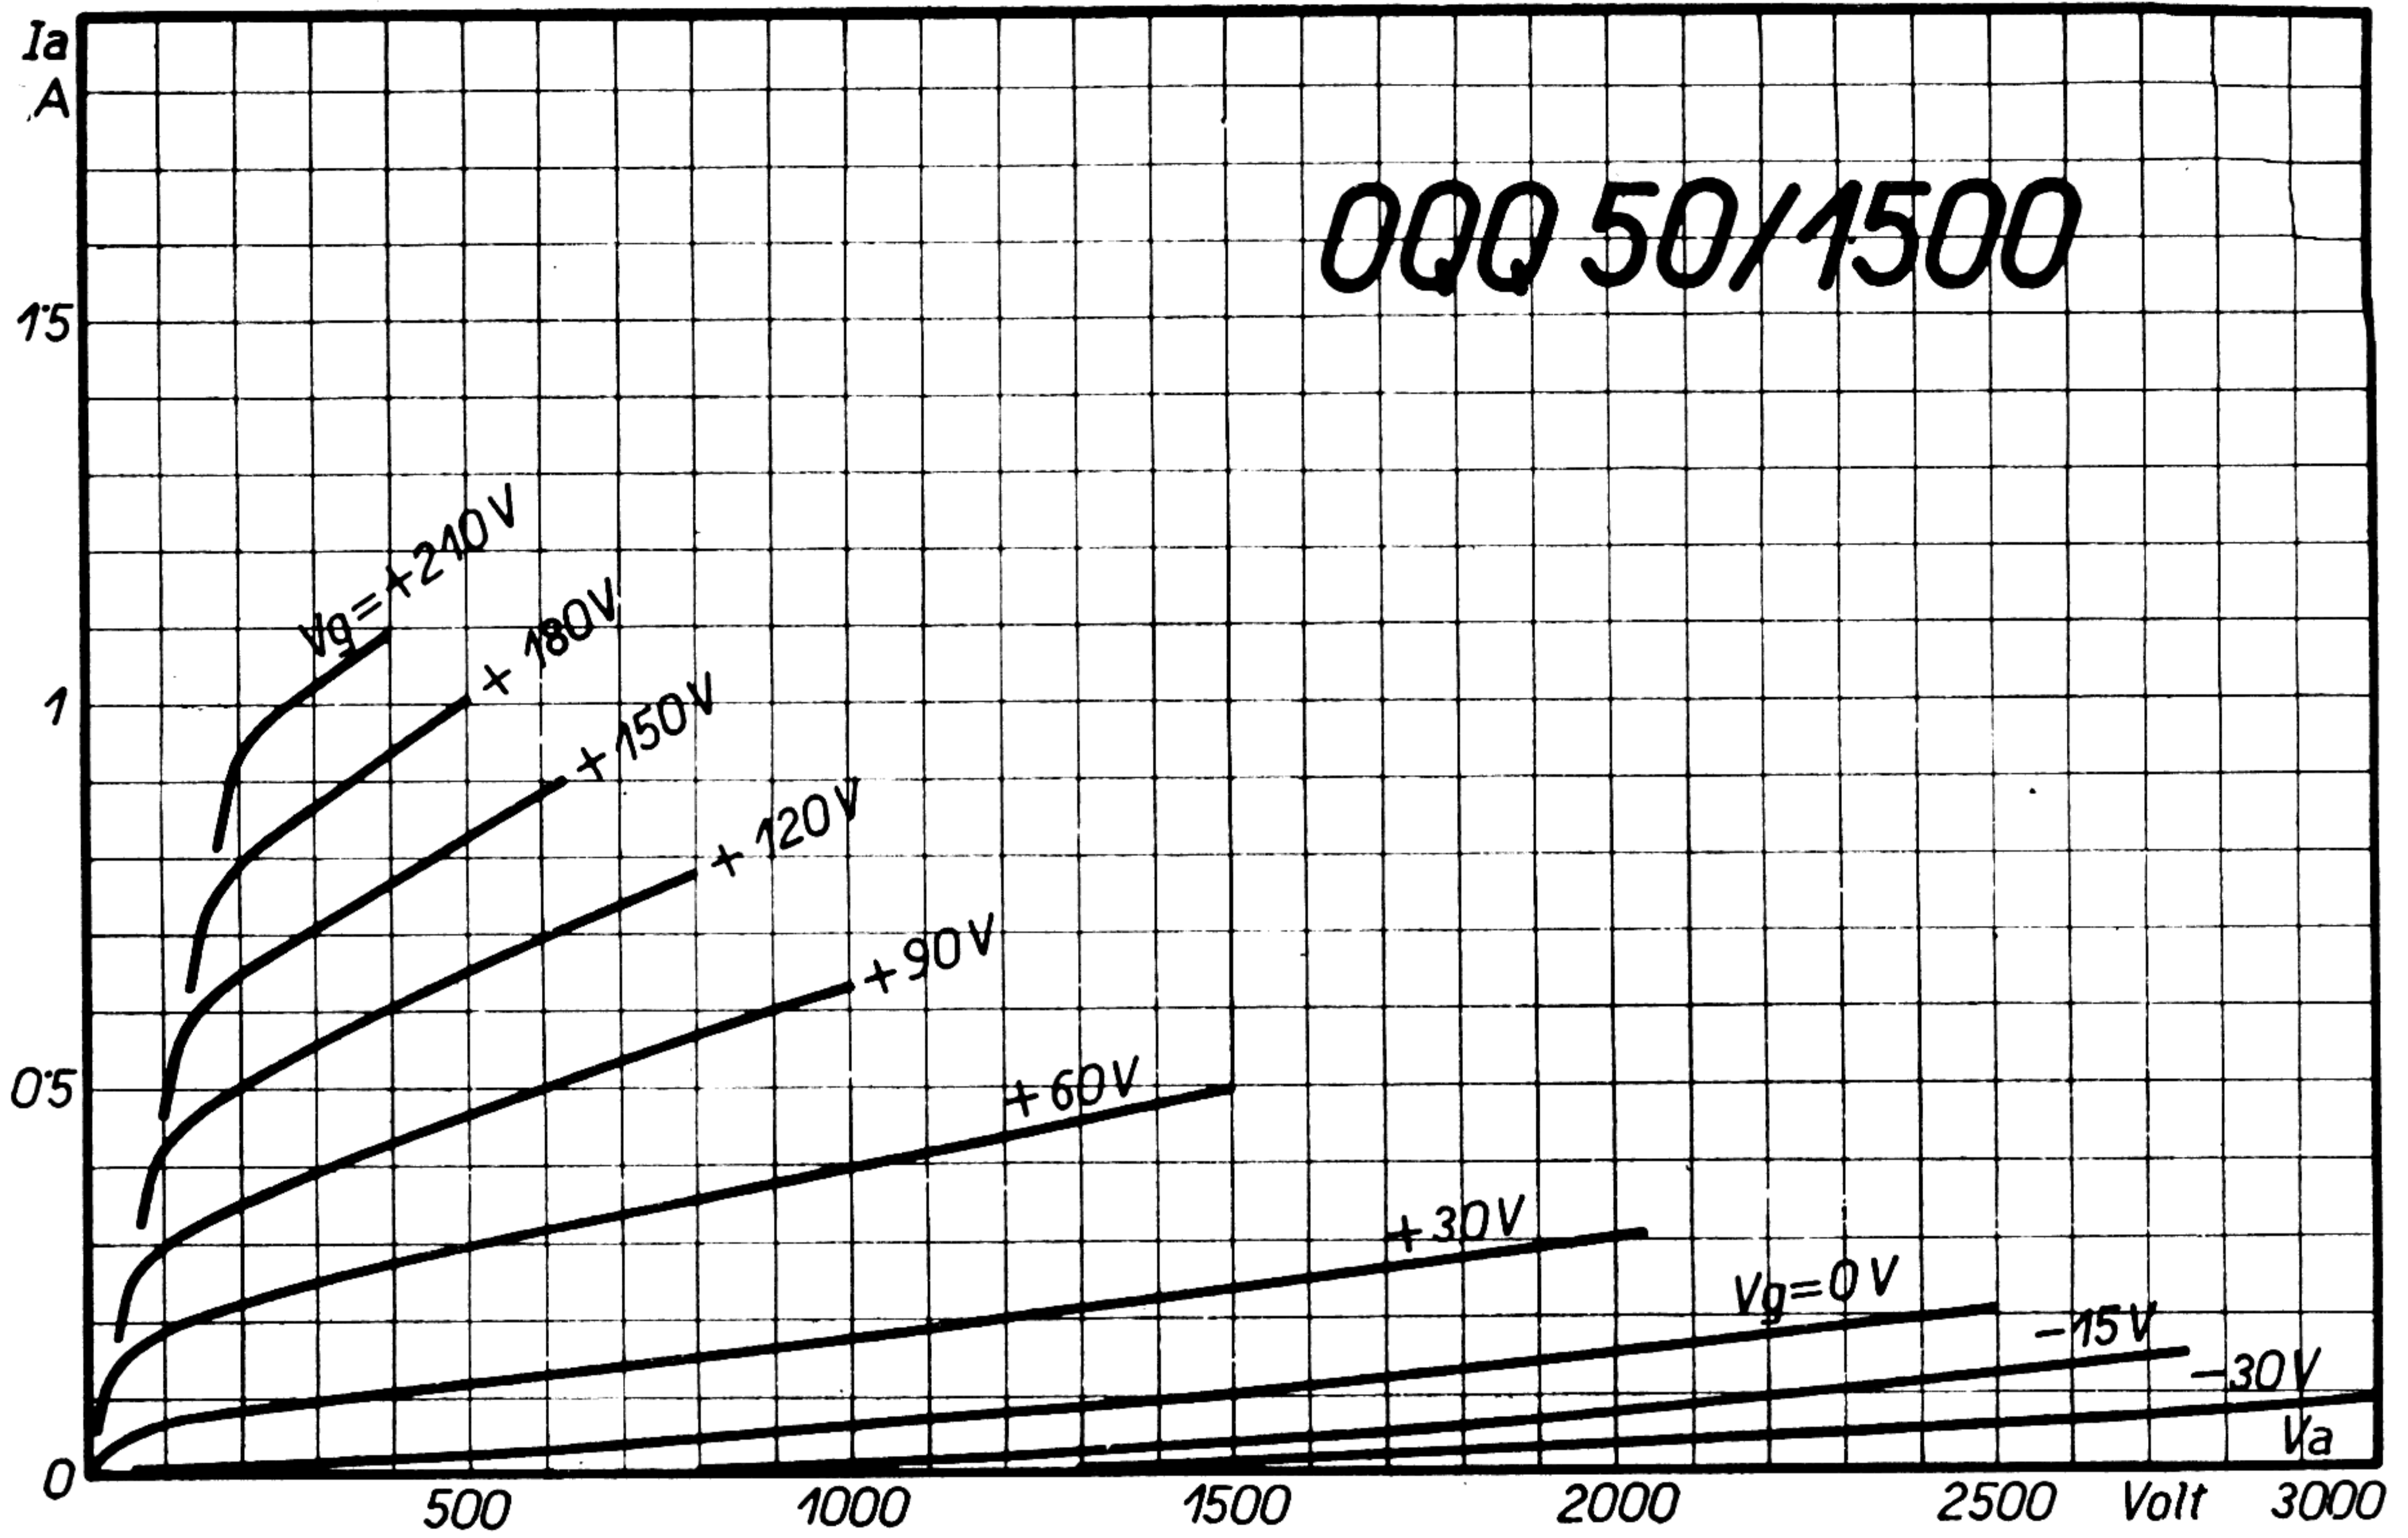

Gitterstromkennlinien

- $V_f = 7,5 \text{ Volt}$
- $I_f = 4 \text{ Amp.}$
- $V_a \text{ max} = 1500 \text{ Volt}$
- $S = 3,6 \text{ mA/V}$
(bei $I_a = 50 \text{ mA}$)
- $g = 47$
- $R_i = 13000 \text{ Ohm}$
- $W_a = 50 \text{ Watt}$

- $C_{ga} = 3 \mu\mu\text{F}$
- $C_{gk} = 2 \mu\mu\text{F}$
- $C_{ak} = 0,2 \mu\mu\text{F}$
- $\lambda \text{ min} = 1,1 \text{ m}$