

## RCA-31

### POWER AMPLIFIER

Filament	Coated	
Voltage	2.0	d-c volts
Current	0.130	amp.
<b>Direct Interelectrode Capacitances:</b>		
Grid to Plate	5.7	$\mu\text{f}$
Grid to Filament	3.5	$\mu\text{f}$
Plate to Filament	2.7	$\mu\text{f}$
Maximum Overall Length		4-1/4"
Maximum Diameter	(2) (3)	1-9/16"
Bulb		ST-12
Base		Small 4-Pin
Pin 1-Filament+	(1) (4)	Pin 3-Grid
Pin 2-Plate		Pin 4-Filament-

BOTTOM VIEW


#### AMPLIFIER (Class A)

#### Operating Conditions and Characteristics:


Filament	2.0	2.0	d-c volts
Plate	135	180	volts
Grid	-22.5	-30	volts
Amp. Factor	3.8	3.8	
Plate Res.	4100	3600	ohms
Mut. Cond.	925	1050	$\mu\text{mhos}$
Plate Cur.	8.0	12.3	ma.
Load Res.	7000	5700	ohms
Self-Bias Res.	2815	2440	ohms
U.P.O.	185	375	mw.

Full or partial self-biasing is to be preferred; required if grid resistor (maximum value 1.0 megohm) is used.

#### AVERAGE CHARACTERISTICS

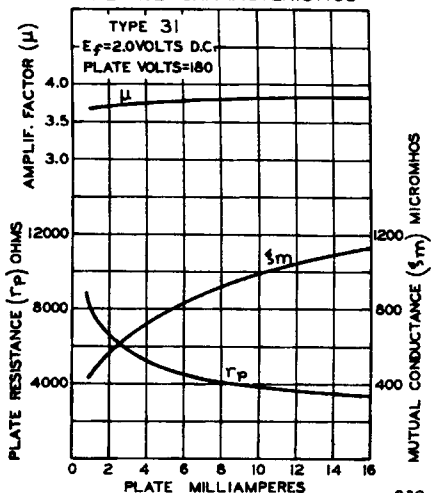

92S-562R2

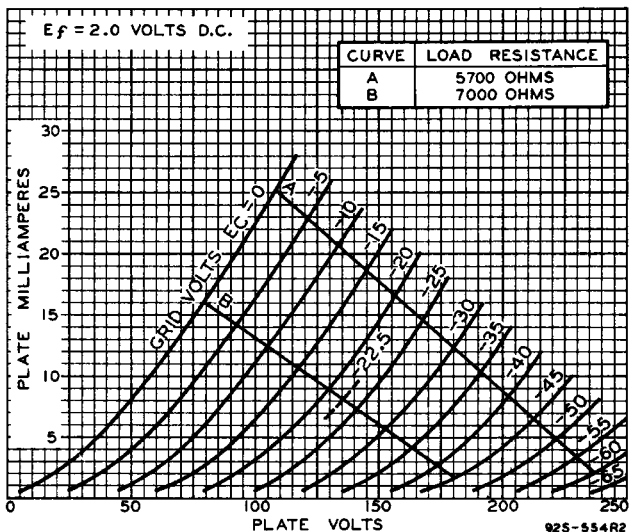**AVERAGE PLATE CHARACTERISTICS**

**AVERAGE CHARACTERISTICS**
