



ENGINEERING DATA

RAYONIC
3XP1
3XP2
3XP7
3XP11

RAYONIC® 3XP1 CATHODE RAY TUBE

GENERAL DATA

Focusing Method Electrostatic
 Deflecting Method Electrostatic
 Phosphor Number P1
 Fluorescent Color Green
 Phosphorescent Color None
 Persistence Medium
 Mounting Position Any

ELECTRICAL DATA

Heater Voltage 6.3 Volts
 Heater Current $0.6 \pm 10\%$ Amperes
 Direct Interelectrode Capacitances (approx.)
 Cathode to all other electrodes $5.2 \mu\text{mf}$
 Grid #1 to all other electrodes $5.7 \mu\text{mf}$
 D1 to D2 $6.9 \mu\text{mf}$
 D3 to D4 $5.4 \mu\text{mf}$
 D1 to all other electrodes $7.0 \mu\text{mf}$
 D2 to all other electrodes $7.4 \mu\text{mf}$
 D3 to all other electrodes $8.0 \mu\text{mf}$
 D4 to all other electrodes $7.3 \mu\text{mf}$

MECHANICAL DATA

Overall Length $8\frac{7}{8} \pm \frac{1}{8}$ Inches

Bulb Dimensions	Greatest Dim.	Min. Useful Screen	
Diagonal	$3\frac{1}{32} \pm \frac{1}{32}$	3	Inches
Width	$3 \pm \frac{3}{64}$	$2\frac{3}{4}$	Inches
Height	$1\frac{1}{32} \pm \frac{3}{64}$	$1\frac{1}{8}$	Inches

Base-Loctal JETEC D8-1

Basing See basing diagram

Base Alignment

- D1D2 trace aligns with pin #3 and tube axis 0 ± 10 Degrees
- Positive voltage on D1 deflects beam approximately toward pin #3
- Positive voltage on D3 deflects beam approximately toward pin #5
- Angle between D3D4 and D1D2 traces; 90 ± 1 Degrees

Trace Alignment

- Angle between trace and bulb wall $\pm 1\frac{1}{2}$ Degrees

Deflection Plates



- D1-D2 are nearest to the screen (3" Dimension)
- D3-D4 are nearest to the base ($1\frac{1}{32}$ " Dimension)

MAXIMUM RATINGS (Design Center Values)

Anode Voltage (A2) 2750 Volts DC
 Anode (A2) Input 6 Watts
 Anode #1 (Focusing Electrode) Voltage 1100 Volts
 Grid #1 (G1) Voltage
 Negative-Bias Value 125 Volts DC
 Positive-Bias Value 0 Volts DC
 Positive-Peak Value 2 Volts
 Peak voltage between Anode #2 and any deflecting plate 550 Volts

QUICK REFERENCE DATA

OSCILLOSCOPE TUBE
 FACE— $1\frac{1}{2}$ " x 3"
 DEFLECTION SENSITIVITY—HIGH
 LENGTH—SHORT
 MONOACCELERATOR
 FACE PLATE—CLEAR, CYLINDRICAL
 DEFLECTION—ELECTROSTATIC
 FOCUSING—ELECTROSTATIC
 JAN APPROVED

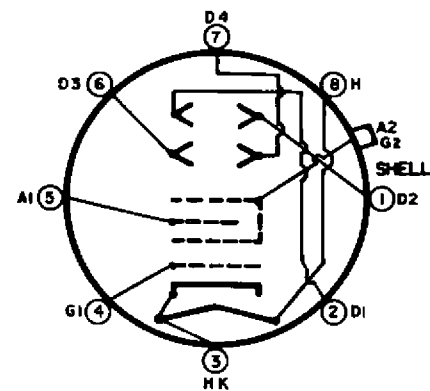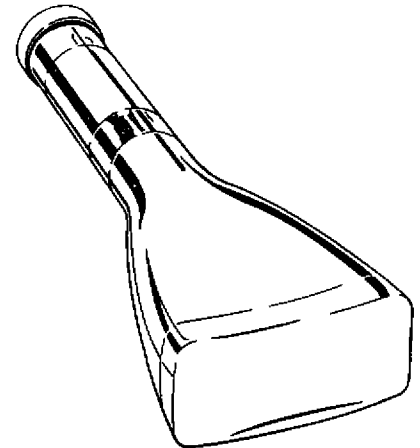

TUBE RATINGS

Focusing Electrode (A1) current for any operating condition	- 15 to +10 μ Amps
Spot Position, Undelected (Note 1)	7.0 Max. mm
Useful Scan	
D1D2	2 $\frac{3}{4}$ Inches
D3D4	1 $\frac{1}{8}$ Inches
A1 Voltage 20% to 35% of A2 Voltage	
G1 Voltage 3.375 max% of A2 Voltage (Note 2)	
Deflection factors	
D1 and D2 (3" Dimension)	34 to 46 Volts DC/inch/A2 Kilovolts
D3 and D4 (1 $\frac{1}{2}$ " Dimension)	14 to 19 Volts DC/inch/A2 Kilovolts

OPERATING CONDITIONS


	Minimum	Typical	Typical	
Anode Voltage (A2)	1000	1500	2000	Volts
Focusing Electrode Voltage (A1)	200 to 350	300 to 525	400 to 700	Volts
Grid #1 Voltage (Note 2)	-34 max.	-51 max.	-67.5 max.	Volts
Deflection Factor D1-D2	34 to 46	51 to 69	68 to 92	Volts DC/Inch
Deflection Factor D3-D4	14 to 19	21 to 28.5	28 to 38	Volts DC/Inch

MAXIMUM CIRCUIT VALUES

Grid #1 Circuit Resistance	1.5 Megohms
Resistance in any Deflecting Electrode Circuit (Note 3)	1.0 Megohms

NOTES

1. With deflecting electrodes connected to Anode (A2).
2. For visual extinction of undeflected focused spot.
3. The resistance in each deflecting electrode circuit should be approximately equal.

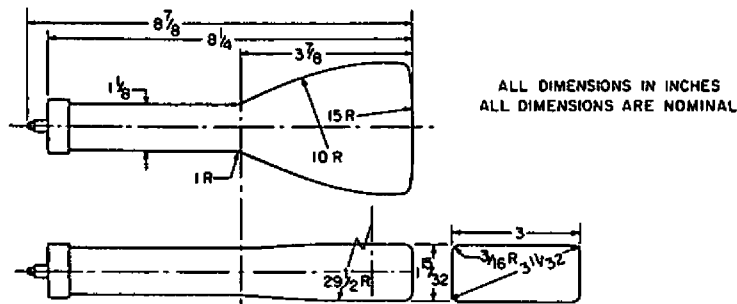

3XP2

The Waterman Rayonic Type 3XP2 is identical to the type 3XP1 except that it has a green fluorescent, green phosphorescent, long persistence phosphor.

3XP7

The Waterman Rayonic Type 3XP7 is identical to the Type 3XP1 except that it has a blue fluorescent, yellow phosphorescent, long persistence phosphor.

3XP11

The Waterman Rayonic Type 3XP11 is identical to the Type 3XP1 except that it has a blue fluorescent, short persistence phosphor.

WATERMAN PRODUCTS CO., INC.

Phone: GARfield 6-8600 Philadelphia 25, Penna., USA Cable Address, Poketscope, Phila.

Manufacturers of POCKETSCOPE®, CRAFTSCOPE®, PULSESCOPE®, PANELSCOPE®,
PANELPACK®, RAKSCOPE®, SYSTEMAT®, RAYONIC® TUBES

