

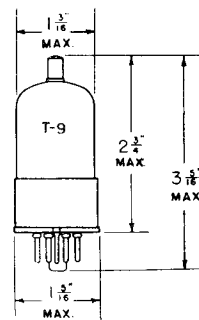


**TUNG-SOL**


**PENTODE AMPLIFIER**

COATED FILAMENT  
 1.4 VOLTS 0.05 AMPERE  
 DC

CLASS BULB

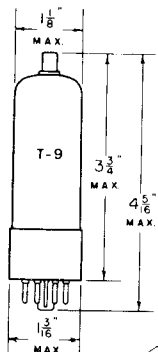

G-5Y



5Y

BOTTOM VIEWS

THE TUNG-SOL 1P5G AND 1P5GT ARE LOW VOLTAGE, LOW CURRENT DRAIN BATTERY TYPE RF PENTODES. WITH THE EXCEPTION OF CAPACITANCES, THEIR ELECTRICAL CHARACTERISTICS ARE IDENTICAL.

**RATINGS**

MAXIMUM FILAMENT VOLTAGE		
DRY BATTERY OPERATION - VOLTAGE MUST NEVER EXCEED	1.6	VOLTS
AC/DC POWER LINE OPERATION - DESIGN CENTER	1.3	VOLTS
MAXIMUM PLATE VOLTAGE	110	VOLTS
MAXIMUM SCREEN VOLTAGE	110	VOLTS

**DIRECT INTERELECTRODE CAPACITANCES<sup>S</sup>**

CONTROL GRID TO FILAMENT	1P5G - 2.2 $\mu\mu\text{f}$	1P5GT - 3 $\mu\mu\text{f}$
PLATE TO FILAMENT	10	$\mu\mu\text{f}$
CONTROL GRID TO PLATE	.007	$\mu\mu\text{f}$

<sup>S</sup> WITH EXTERNAL SHIELD CONNECTED TO NEGATIVE FILAMENT (PIN #7).

**TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS**

**CLASS A<sub>1</sub> AMPLIFIER**

PLATE VOLTAGE	90	VOLTS
SCREEN VOLTAGE	90	VOLTS
CONTROL GRID VOLTAGE	RETURN TO NEGATIVE FILAMENT	
PLATE CURRENT	2.3	MA.
SCREEN CURRENT	0.7	MA.
PLATE RESISTANCE	APPROX. 0.8	MEG OHM
TRANSCONDUCTANCE	750	$\mu\text{MHOS}$
CONTROL GRID VOLTAGE FOR	- 12	VOLTS
TRANSCONDUCTANCE OF 10 $\mu\text{MHOS}$		

FOR "INTERPRETATION OF RATINGS" REFER TO FRONT OF BOOK.

PLATE  
 1013-2  
 APR. 21  
 1941