


**TUNG-SOL**

HALF WAVE, HIGH VACUUM RECTIFIER

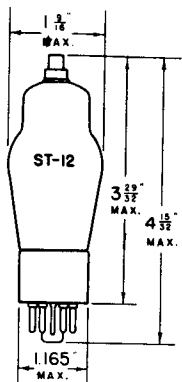


TUNGSTEN FILAMENT

2.5 VOLTS 5 AMPERES  
AC

GLASS BULB

SMALL SHELL OCTAL 6 PIN BASE

MOUNTING POSITION - VERTICAL ONLY



BOTTOM VIEW

THE 2V3G IS INTENDED FOR USE AS THE RECTIFIER IN THE HIGH VOLTAGE SUPPLY FOR CATHODE-RAY TUBES.

**RATINGS\***

MAXIMUM PEAK INVERSE VOLTAGE	16500	VOLTS
MAXIMUM PEAK PLATE CURRENT	12	MA.
MAXIMUM AVERAGE PLATE CURRENT	2	MA.

\* INTERPRETED ACCORDING TO RMA STANDARD MB-210

PRINTED IN U. S. A.

PLATE  
1410  
MARCH 15  
1944