



# Repeater Triode

3A/107A  
3A/107B

3A/107A

3A/107B

(3A/107A is for replacement purposes only)

## CATHODE.

Oxide-coated filament

Current	0.25	A
Nominal voltage	4	V

## RATING.

Amplification factor	{ Measured at $V_a$ 130V } 7	ohms
Impedance		

## DIRECT INTER-ELECTRODE CAPACITIES.

Grid to anode	4.7	pF
Grid to filament	6.2	pF
Anode to filament	2.1	pF

## BASE.

3A/107A American 4-pin bayonet



3A/107B Standard 5-pin British

## DIMENSIONS.

Maximum overall length		
3A/107A	116	mm.
3A/107B	118	mm.
Maximum bulb diameter	46	mm.
Net weight	44	g.

## MAXIMUM RATINGS.

Maximum direct anode voltage	190	V
------------------------------	-----	---

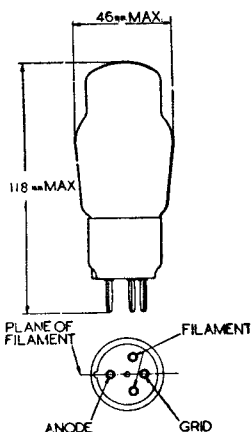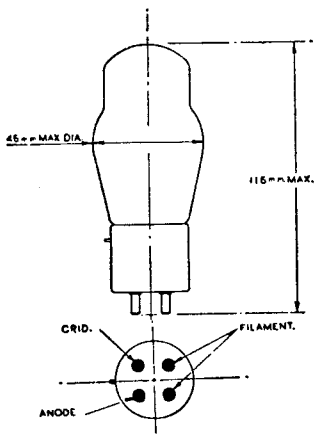

3A/107A  
3A/107B

# Repeater Triode



3A/107A  
3A/107B

