

# EDISWAN

68532

FULL WAVE GAS DISCHARGE RECTIFIER  
(Previously U235)

**REPLACEMENT TYPE**

68532



## GENERAL

Type 68532 is a full wave gas discharge rectifier suitable for use in low voltage charging circuits. ←

## RATING

Filament Voltage (volts)	$V_f$	2.0
Filament Current (amps)	$I_f$	3.5
D.C. Output	20 volts	2 amps

## DIMENSIONS

Maximum Overall Length (including Pins) (mm)	110
Maximum Diameter (mm)	45
Approximate Nett Weight (ozs)	1½
Approximate Home Packed Weight (ozs)	2½
Approximate Export Packed Weight (ozs)	4

## MOUNTING POSITION—Vertical

July, 1957

Industrial  
VALVE & CRT DIVISION

Issue 2/6

SIEMENS EDISON SWAN LIMITED

Indicates a change ←

68532



# EDISWAN

68532 ←

FULL WAVE GAS DISCHARGE RECTIFIER  
(Previously U235)

**REPLACEMENT TYPE** ←  
←

---

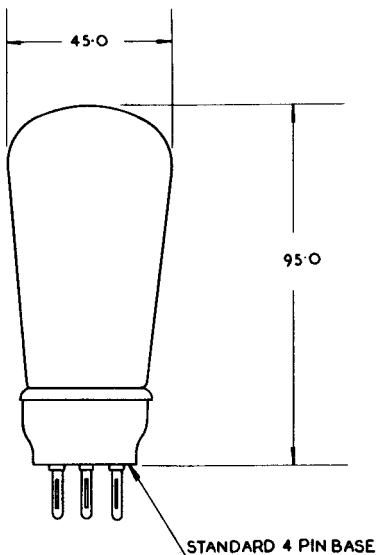

ALL DIMS IN m.m. ←

Indicates a change ←

July, 1957

Industrial  
VALVE & CRT DIVISION

Issue 2/6

SIEMENS EDISON SWAN LIMITED