

**CHARACTERISTICS**

**GENERAL DATA**

Focusing Method . . . . .	Electrostatic
Deflection Method . . . . .	Magnetic
Deflection Angles (Approx.)	
Horizontal . . . . .	102 Degrees
Diagonal . . . . .	114 Degrees
Vertical . . . . .	86 Degrees
Phosphor . . . . .	Aluminized P4
Fluorescence . . . . .	White
Persistence . . . . .	Short to Medium
Faceplate . . . . .	Bonded Shield
(Gray Filter Glass Safety Plate Laminated Directly to Face of Tube)	
Light Transmittance of Faceplate Assembly (Approx.) . . . . .	44 Percent
19BQP4: External Surface of Safety Plate Treated to Reduce Specular Reflection	

**ELECTRICAL DATA**



Heater Voltage . . . . .	6.3 Volts	
Heater Current . . . . .	0.60 ± 5 % Ampere	
Heater Warm-up Time <sup>1</sup> . . . . .	11 Seconds	
Direct Interelectrode Capacitances (Approx.)		
Cathode to All Other Electrodes . . . . .	5 μf	
Grid No. 1 to All Other Electrodes . . . . .	6 μf	
External Conductive Coating to Anode <sup>2</sup> . . . . .	1500 μf	Max.
	1000 μf	Min.

**MECHANICAL DATA**

Minimum Useful Screen Dimensions (Maximum Assured)	
Height . . . . .	12 <sup>1</sup> / <sub>16</sub> Inches
Width . . . . .	15 <sup>1</sup> / <sub>4</sub> Inches
Diagonal . . . . .	17 <sup>5</sup> / <sub>8</sub> Inches
Area . . . . .	172 Sq. Inches
Neck Length . . . . .	5 <sup>1</sup> / <sub>8</sub> ± <sup>1</sup> / <sub>8</sub> Inches
Overall Length . . . . .	12 <sup>5</sup> / <sub>8</sub> ± <sup>5</sup> / <sub>16</sub> Inches
Bulb . . . . .	J149C
Safety Plate	
19BNP4 . . . . .	FP159A
19BQP4 . . . . .	FP159B
Bulb Contact	
(Recessed Small Cavity Cap) . . . . .	J1-21
Base . . . . .	B7-208
Basing . . . . .	8HR
Weight (Approx.) . . . . .	18 <sup>1</sup> / <sub>2</sub> Pounds

**QUICK REFERENCE DATA**

Television Picture Tube  
 19" Direct Viewed  
 Rectangular Glass Type  
 Spherical Faceplate  
 Bonded Shield  
 Gray Filter Glass  
 Aluminized Screen  
 Electrostatic Focus  
 114° Magnetic Deflection  
 External Conductive Coating  
 19BQP4: Anti-Reflection  
 Treated



**SYLVANIA  
ELECTRONIC TUBES**  
 A Division of  
 Sylvania Electric Products Inc.  
**PICTURE TUBE  
OPERATIONS**  
**SENECA FALLS, NEW YORK**

*Prepared and Released By The  
 TECHNICAL PUBLICATIONS SECTION  
 EMPORIUM, PENNSYLVANIA*

MAY, 1962  
 PAGE 1 OF 3

*File Under*  
**TELEVISION PICTURE TUBES**

**RATINGS**

**MAXIMUM RATINGS (Design Maximum Values) Cathode Drive Service<sup>3</sup>**

Maximum Anode Voltage . . . . .	20,000 Volts	dc
Minimum Anode Voltage . . . . .	12,000 Volts	dc
Grid No. 4 Voltage (Focusing Electrode) . . . . .	-550 to +1100 Volts	dc
Grid No. 2 Voltage . . . . .	70 Volts	dc
Cathode Voltage		
Negative Bias Value . . . . .	0 Volts	dc
Negative Peak Value . . . . .	2 Volts	
Positive Bias Value . . . . .	155 Volts	dc
Positive Peak Value . . . . .	220 Volts	
Peak Heater-Cathode Voltage		
Heater Negative with Respect to Cathode		
During Warm-up Period Not to Exceed 15 Seconds . . . . .	450 Volts	
After Equipment Warm-up Period . . . . .	200 Volts	
Heater Positive with Respect to Cathode . . . . .	200 Volts	

**TYPICAL OPERATING CONDITIONS, Cathode Drive Service<sup>3</sup>**

Anode Voltage . . . . .	16,000 Volts	dc
Grid No. 4 Voltage for Focus . . . . .	0 to +400 Volts	ds
Grid No. 2 Voltage . . . . .	50 Volts	dc
Cathode Voltage Required for Cutoff <sup>1</sup> . . . . .	+32 to +50 Volts	dc

**CIRCUIT VALUES**

Grid No. 1 Circuit Resistance . . . . .	1.5 Megohms Max.
---	------------------

**NOTES:**

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80 % of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
2. External conductive coating must be grounded.
3. Voltages are positive with respect to Grid No. 1 Voltage, unless otherwise indicated.
4. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more positive.

**WARNING:**

*X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.*

OUTLINE

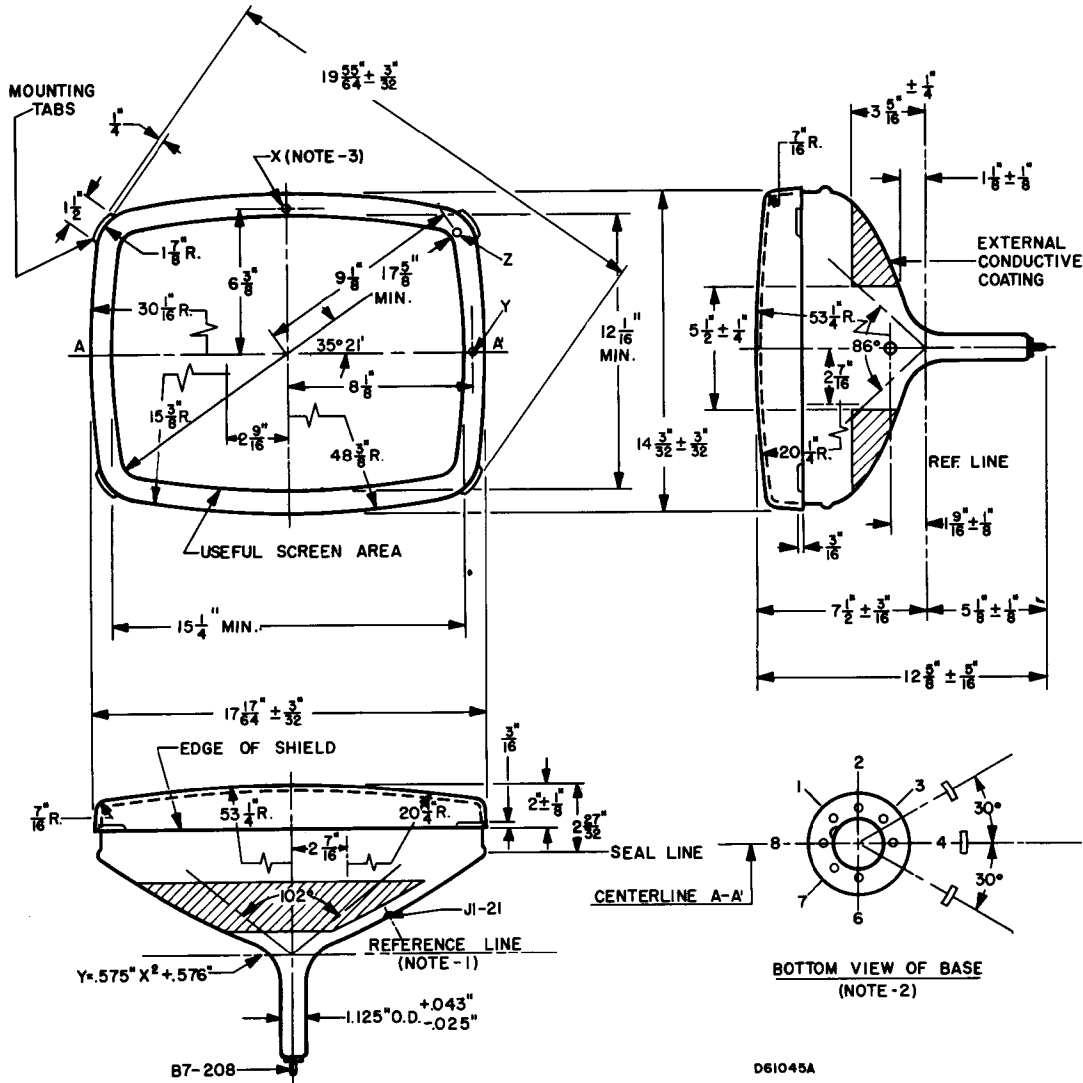


DIAGRAM NOTES:

1. Reference line is determined by plane C-C' of JEDEC No. 126 Reference Line Gauge, when the gauge is seated against the bulb.
2. Base Pin No. 4 aligns with horizontal centerline (A-A') within  $30^{\circ}$  and is on same side as anode contact, J1-21.
3. Planes perpendicular to tube axis and passing through Points X, Y, and Z are located as follows:
  - Plane tangent to crown of face to plane of X: 0.531" Nominal
  - Plane of X to plane of Y =  $.421'' \pm .025''$
  - Plane of X to plane of Z =  $.738'' \pm .045''$

D61045A