

TUNG-SOL

CATHODE RAY

THE 17AP4 IS A DIRECT VIEW PICTURE TUBE DESIGNED FOR USE IN TELEVISION APPLICATIONS. ITS FEATURES INCLUDE:

GREY FILTER FACEPLATE	UNIPOTENTIAL CATHODE
EXTERNAL CONDUCTIVE COATING	MAGNETIC FOCUS & DEFLECTION
RECTANGULAR GLASS CONSTRUCTION	EXTERNAL SINGLE FIELD ION TRAP
10 3/4" X 14 1/4" RASTER SIZE	

ELECTRICAL DATA

FOCUSING METHOD		MAGNETIC
DEFLECTING METHOD		MAGNETIC
DEFLECTION ANGLE (APPROX.)		
HORIZONTAL	65	DEGREES
DIAGONAL	70	DEGREES
DIRECT INTERELECTRODE CAPACITANCES (APPROX.)		
CATHODE TO ALL OTHER ELECTRODES	5	μf
GRID #1 TO ALL OTHER ELECTRODES	7	μf
MAXIMUM EXTERNAL CONDUCTIVE COATING TO ANODE	2 000	μf
MINIMUM EXTERNAL CONDUCTIVE COATING TO ANODE	750	μf

OPTICAL DATA


PHOSPHOR NUMBER		NO. 4
FLUORESCENT COLOR		WHITE
PHOSPHORESCENT COLOR		WHITE
PERSISTENCE		MEDIUM
FACEPLATE LIGHT TRANSMISSION AT CENTER (APPROX.)	66	PERCENT

MECHANICAL DATA

OVERALL LENGTH	18 5/8 \pm 3/8	INCHES
GREATEST DIMENSIONS OF BULB		
DIAGONAL	16 5/8 \pm 1/8	INCHES
WIDTH	15 3/8 \pm 1/8	INCHES
HEIGHT	12 1/4 \pm 1/8	INCHES
MINIMUM USEFUL SCREEN DIMENSIONS		
WIDTH	14 1/4	INCHES
HEIGHT	10 3/4	INCHES
BULB CONTACT	RECESSED SMALL CAVITY CAP	J4-21
BASE	SMALL SHELL DUODECAL 5 PIN	85-57
BASING		12N
BULB CONTACT ALIGNMENT		
J4-21 CONTACT ALIGNS WITH VACANT PIN POSITION #6 \pm 30 DEGREES		

PIN CONNECTIONS

PIN 1 - HEATER
 PIN 2 - GRID NO. 1
 PIN 10 - GRID NO. 2
 PIN 11 - CATHODE



PIN 12 - HEATER
 ANODE CAP:
 GRID NO. 3

BOTTOM VIEW

CONTINUED ON FOLLOWING PAGE

TUNG-SOL

CONTINUED FROM PRECEDING PAGE

RATINGS
DESIGN CENTER VALUES

HEATER VOLTAGE	6.3	VOLTS
HEATER CURRENT	0.6	AMP.
MAXIMUM DC ANODE VOLTAGE	16 000	VOLTS
MAXIMUM DC GRID #2 VOLTAGE	410	VOLTS
MAXIMUM GRID #1 VOLTAGE		
DC NEGATIVE-BIAS VALUE	125	VOLTS
DC POSITIVE-BIAS VALUE	0	VOLTS
POSITIVE-PEAK VALUE	2	VOLTS
MAXIMUM DC PEAK HEATER-CATHODE VOLTAGE		
HEATER NEGATIVE WITH RESPECT TO CATHODE		
DURING WARM-UP PERIOD NOT TO EXCEED 15 SECONDS	410	VOLTS
AFTER EQUIPMENT WARM-UP PERIOD	150	VOLTS
HEATER POSITIVE WITH RESPECT TO CATHODE	150	VOLTS

TYPICAL OPERATING CONDITIONS AND CHARACTERISTICS

DC ANODE VOLTAGE	12 000	VOLTS
DC GRID #2 VOLTAGE	300	VOLTS
DC GRID #1 VOLTAGE ^A	-33 TO -77	VOLTS
DC FOCUSING COIL CURRENT (APPROX.) ^B	100 ± 20%	MA.
DC ION TRAP CURRENT STANDARD COIL #111	75 ± 50%	MA.



^A VISUAL EXTINCTION OF UNDEFLECTED FOCUSED SPOT.

^B FOR STANDARD FOCUS COIL #109, OR EQUIVALENT, WITH THE COMBINED GRID #1 BIAS VOLTAGE AND VIDEO SIGNAL VOLTAGE ADJUSTED TO PRODUCE A HIGHLIGHT BRIGHTNESS OF 25 FOOT LAMBERTS ON A 14 1/4" BY 10 3/4" PICTURE SIZE. DISTANCE FROM REFERENCE LINE TO CENTER OF AIR GAP ON FOCUS COIL SHALL BE 3.0 INCHES.

CIRCUIT VALUES

MAXIMUM GRID #1 CIRCUIT RESISTANCE	1.5	MEGOHMS
------------------------------------	-----	---------

TUNG-SOL

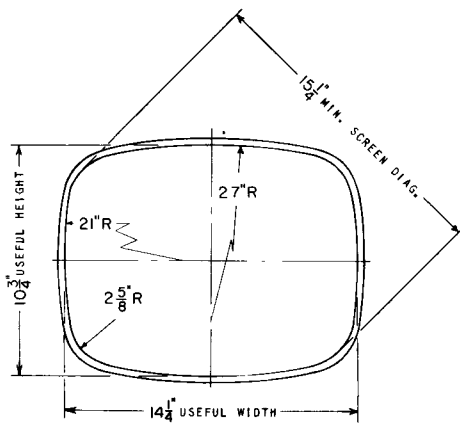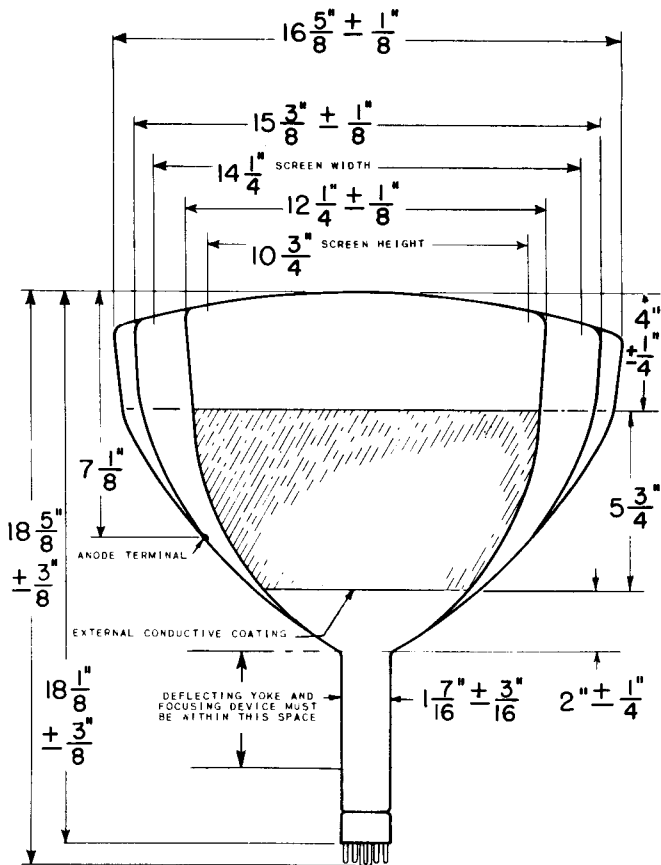

PRINTED IN U. S. A.