

CHARACTERISTICS

GENERAL DATA

| | |
|------------------------------------------------------------------------|-----------------|
| Focusing Method | Electrostatic |
| Deflection Method | Magnetic |
| Deflection Angles (Approx.)* | |
| Horizontal | 76 Degrees |
| Diagonal | 87 Degrees |
| Vertical | 62 Degrees |
| Phosphor | Aluminized P4 |
| Fluorescence | White |
| Persistence | Short to Medium |
| Faceplate | Bonded Shield |
| (Gray Filter Glass Safety Plate Laminated Directly to Face of Tube) | |
| Light Transmittance of Faceplate Assembly (Approx.) | 40 Percent |

ELECTRICAL DATA

| | |
|-------------------------------------------------------------|----------------------------------------------------------|
| Heater Voltage | 6.3 Volts |
| Heater Current | $0.60 \pm 5\%$ Ampere |
| Heater Warm-up Time ¹ | 11 Seconds |
| Direct Interelectrode Capacitances (Approx.) | |
| Cathode to All Other Electrodes | 5 $\mu\mu\text{f}$ |
| Grid No. 1 to All Other Electrodes | 6 $\mu\mu\text{f}$ |
| External Conductive Coating to Anode ² | 2500 $\mu\mu\text{f}$ Max. 2000 $\mu\mu\text{f}$ Min. |



MECHANICAL DATA

| | |
|-------------------------------------------------------|--------------------------------------------|
| Minimum Useful Screen Dimensions (Maximum Assured) | |
| Height | 15 $\frac{1}{4}$ Inches |
| Width | 19 $\frac{5}{16}$ Inches |
| Diagonal | 22 $\frac{5}{16}$ Inches |
| Area | 282 Sq. Inches |
| Neck Length | 5 $\frac{1}{2} \pm \frac{3}{16}$ Inches |
| Overall Length | 19 $\frac{11}{32} \pm \frac{7}{16}$ Inches |
| Bulb | C187 Exp. No. 2 |
| Safety Plate | FP198A or Equiv. |
| Bulb Contact (Recessed Small Cavity Cap) | J1-21 |
| Base | B6-63 |
| Basing | 12L |
| Weight (Approx.) | 35 Pounds |

*Diagonal Deflection Angle is equal to that of earlier registered 21" tubes generally known as 90° types. Horizontal and vertical deflection angles are less.

QUICK REFERENCE DATA

- Television Picture Tube
- 23" Direct Viewed
- Rectangular Glass Type
- Spherical Faceplate
- Bonded Shield
- Gray Filter Glass
- Aluminized Screen
- Electrostatic Focus
- 90° Magnetic Deflection
- No Ion Trap
- External Conductive Coating



12-1

SYLVANIA
ELECTRONIC TUBES
 A Division of
 Sylvania Electric Products Inc.
PICTURE TUBE OPERATIONS
SENECA FALLS, NEW YORK
Prepared and Released By The
TECHNICAL PUBLICATIONS SECTION
EMPORIUM, PENNSYLVANIA
 AUGUST, 1960
 PAGE 1 OF 3
File Under
TELEVISION PICTURE TUBES

RATINGS

MAXIMUM RATINGS (Design Maximum Values) Grid Drive Service

| | 23TP4 | 23ACP4 | |
|----------------------------------------------------------|--------------|---------------------|----|
| Maximum Anode Voltage | 22,000 | 18,000 Volts | dc |
| Minimum Anode Voltage | 12,000 | 8,000 Volts | dc |
| Grid No. 4 Voltage (Focusing Electrode) | | -550 to +1100 Volts | dc |
| Grid No. 2 Voltage | | 550 Volts | dc |
| Grid No. 1 Voltage | | | |
| Negative Bias Value | | 155 Volts | dc |
| Negative Peak Value | | 220 Volts | |
| Positive Bias Value | | 0 Volts | dc |
| Positive Peak Value | | 2 Volts | |
| Peak Heater-Cathode Voltage | | | |
| Heater Negative with Respect to Cathode | | | |
| During Warm-up Period not to Exceed 15 Seconds | | 450 Volts | |
| After Equipment Warm-up Period | | 200 Volts | |
| Heater Positive with Respect to Cathode | | 200 Volts | |

TYPICAL OPERATING CONDITIONS (Grid Drive Service)

| | | |
|---------------------------------------------------------------|------------------|----|
| Anode Voltage | 16,000 Volts | dc |
| Grid No. 4 Voltage for Focus | 0 to +400 Volts | dc |
| Grid No. 2 Voltage | 300 Volts | dc |
| Grid No. 1 Voltage Required for Cutoff ³ | -35 to -72 Volts | dc |

CIRCUIT VALUES

| | |
|-----------------------------------------|------------------|
| Grid No. 1 Circuit Resistance | 1.5 Megohms Max. |
|-----------------------------------------|------------------|


NOTES:

1. Heater warm-up time is defined as the time required for the voltage across the heater to reach 80% of the rated heater voltage after applying four (4) times rated heater voltage to a circuit consisting of the tube heater in series with a resistance equal to three (3) times the rated heater voltage divided by the rated heater current.
2. External conductive coating must be grounded.
3. Visual extinction of focused raster. Extinction of stationary focused spot will require that these values be about 5 volts more negative.

WARNING:

X-ray radiation shielding may be necessary to protect against possible danger of personal injury from prolonged exposure at close range if this tube is operated at higher than the manufacturer's Maximum Rated Anode Voltage or 16,000 volts, whichever is less.

OUTLINE

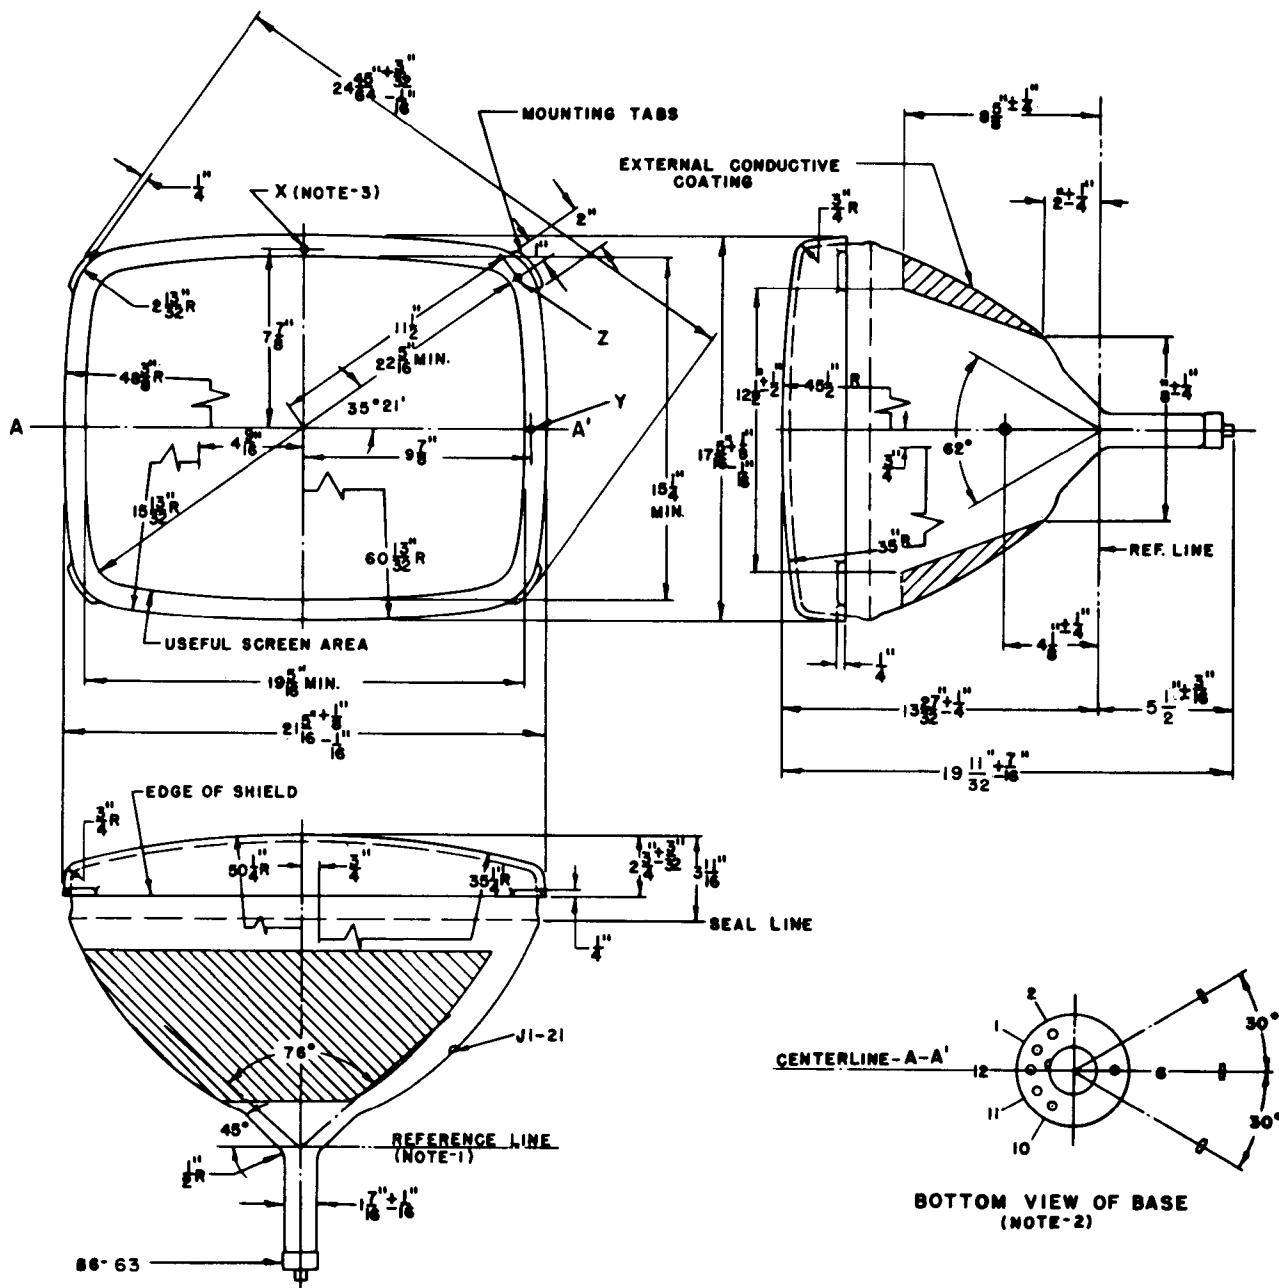

D60014A

DIAGRAM NOTES:

1. Reference line is determined by plane C-C' of JEDEC No. 116 Reference Line Gauge, when the gauge is seated against the bulb.
2. Base Pin No. 6 aligns with horizontal centerline (A-A') within 30° and is on same side as anode contact, J1-21.
3. Planes perpendicular to tube axis and passing through points X, Y and Z are located as follows:
 Plane tangent to crown of face to plane of X: $.758$ " Nom.
 Plane of X to plane of Y = $.463 \pm .030$ ".
 Plane of X to plane of Z = $.970 \pm .030$ ".